



M230i-T4/T6

Modular and flexible Print & Apply labelling

With the **M230i-T4** and **M230i-T6** you will get the most flexible and safe Print & Apply solution on the market. Providing a choice of three standard stroke lengths, seven standard non stick pad sizes and left or right hand configuration, the **M230i-T4** and **M230i-T6** is highly configurable to meet your needs now and in the future.



Easy to operate - simple operation and unrivalled capability

- ◆ Clear monitoring & control with optional **TouchPanel** colour user interface
- ◆ Easy navigation and operation with intuitive **QuickStep** software
- ◆ Minimum downtime with tool-free magnetic printhead mounting system & expanding ribbon mandrels

Lower Total Cost of Ownership – reduced cost and increased efficiency

- ◆ Increased printhead life
- ◆ Lower material wastage with full label coverage allowing optimum label size
- ◆ Increased uptime with fast consumable and print head changes

Improved performance - sets the standard for efficiency

- ◆ 600m ribbon & label roll capacity within a compact footprint
- ◆ Increased print speed for reduced cycle times
- ◆ Robust design supports all mounting orientations
- ◆ Supply chain compliance with full GSI coding capability at high resolution including bar codes, text and graphics



Domino. Do more.

Benefits of Tamp Applicator


- ◆ Flexible multi-purpose Print & Apply solution
- ◆ Labelling of moving or stationary products
- ◆ Accurate & consistent label position
- ◆ Easy and fast pad changes
- ◆ Side, top or bottom labelling
- ◆ Applies last label printed
- ◆ Industrial robust design
- ◆ Left and right hand versions as standard



Optional QuickStep User Interface

For effortless control and status reporting **QuickStep** is our unique, simplified operator interface that gets the printer into action quickly and simply. No complex menus or parameters, just enter the job and away you go.

- ◆ Quick access to favourite menus and settings via large user-friendly icons and customisable home screen.
- ◆ Easy, prompted input of data into label templates.
- ◆ Speed up changeovers and help eliminate coding selection errors with simplified Message Store and live WYSIWYG preview.

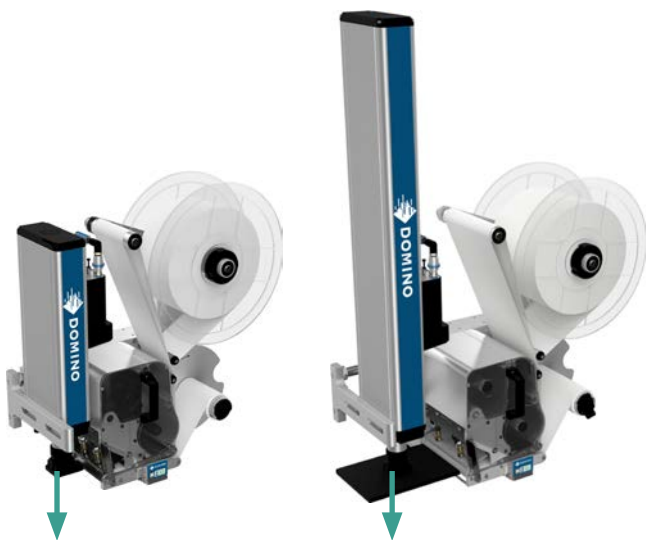

Technical Specification M230i-T4/T6

Print technologies:	Thermal Transfer
Print resolutions:	12 dots/mm (300dpi)
Typical speeds:	10-85 labels per min
Label sizes:	32x55mm to 150x210mm
Label & ribbon lengths:	600m
Distance to product:	Up to 560mm
Pneumatics:	6 bar compressed air
Communication:	2 x RS232, 1 x USB 2.0, Ethernet
I/Os (configurable):	10 Inputs and 10 Outputs
User interface:	Graphical display with 25 languages
Overall Dimensions:	560x625x272mm (Printer & Applicator min)
(LxHxW)	671x952x327mm (Printer & Applicator max)
	406x278x129mm (Controller - PCU)